




**CANBERRA FILTER SERVICES PTY LTD** ABN: 40 089 213 356

9 Whyalla Street  
 (PO Box 792)  
 Fyshwick ACT 2609  
 Email: [cfs@canberrafilterservices.com.au](mailto:cfs@canberrafilterservices.com.au)  
[accounts@canberrafilterservices.com.au](mailto:accounts@canberrafilterservices.com.au)

Telephone: (02) 6280 4055  
 (02) 6280 4306  
 Facsimile: (02) 6280 5180

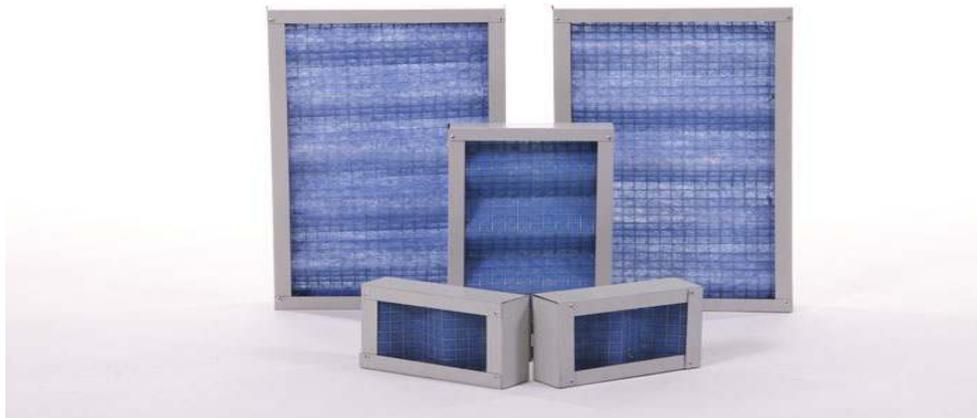

**CFS 50mm and 100mm V Form Pleated Panel Filters**

Canberra Filter Services 50mm and 100mm Pleated Panel Filters are designed for the use in a wide range of air-conditioning and heating units.  
 The media can be washable or disposable, depending on your needs.  
 The Filters are available in any size to suit your requirements.  
 These filters can be refilled in our factory at short notice.  
 Performance data is shown below for the most widely used media, but special purpose filters are available on request.

**PERFORMANCE DATA – 50mm & 100mm V-FORM PLEATED PANEL FILTERS**

Model No.	V50/F1-350	V50/F1-500	V50/F1-600	V100/F1-350	V100/F1-500	V100/F1-600	
Regenerability	Semi Disposable	Semi Disposable	Disposable	Semi Disposable	Semi Disposable	Disposable	
Face Velocity M/S	1.8	1.8	1.8	2.3	2.3	2.3	
Initial Resistance PA	30 PA	34 PA	65 PA	20 PA	45 PA	60 PA	
Average Efficiency % To AS 1132	No 1 Dust	–	21.8 Initial	35	–	21.8 Initial	35
	No 2 Dust	85	95	95	85	95	99.5
	No 3 Dust	85	–	–	85	–	–
	No 4 Dust	85	88.5	94	85	88.5	92
Dust Holding	No 4 Dust	412 GM/M <sup>2</sup>	455 GM/M <sup>2</sup>	288 GM/M <sup>2</sup>	412 GM/M <sup>2</sup>	455 GM/M <sup>2</sup>	455 GM/M <sup>2</sup>
Rating		EU3/G3	EU4/F4	EU5/F5	EU3/G3	EU4/F4	EU5/F5